


PETROFLANGE

NORMA MSS SP - 44 CLASE 300#

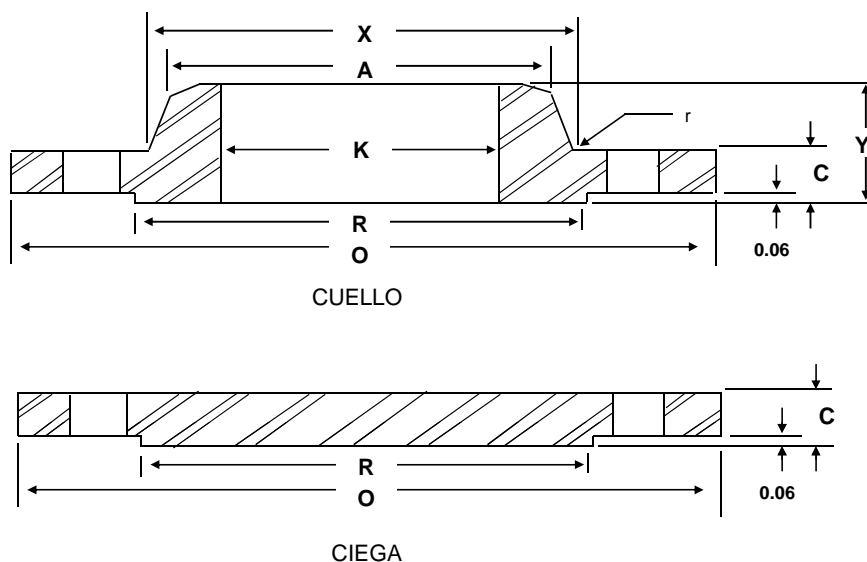

DIAM. NOM.	O	C		R	X	No. / DIAM BARRENO	DIAM CIRC BARR	Y	r (MIN)	K	A	Peso Aprox. (Kgs.)		
		CUELLO	CIEGA									CUELLO	CIEGA	
26	38.25	3.13	3.31	29.50	28.38	28-1.75	34.50	7.25	0.38	D E B E P O S R E R E L S P C E L C I E F N I T C E A D O	D E B E P O	274.67	489.41	
28	40.75	3.38	3.56	31.50	30.50	28-1.75	37.00	7.75	0.44		S R	E P O	338.23	597.01
30	43.00	3.63	3.75	33.75	32.56	28-1.88	39.25	8.25	0.44		E P O	S R	394.98	700.52
32	45.25	3.88	3.94	36.00	34.69	28-2.00	41.50	8.75	0.44		S R	E P O	456.27	814.93
34	47.50	4.00	4.13	38.00	36.88	28-2.00	43.50	9.13	0.50		E P O	S R	519.83	938.87
36	50.00	4.13	4.38	40.25	39.00	32-2.13	46.00	9.50	0.50		S R	E P O	578.85	1105.94
38	46.00	4.25	4.25	40.50	39.13	32-1.63	43.00	7.13	0.50		E P O	S R	315.53	908.45
40	48.75	4.50	4.50	42.75	41.25	32-1.75	45.50	7.63	0.50		S R	E P O	381.36	1080.52
42	50.75	4.69	4.69	44.75	43.25	32-1.75	47.50	7.88	0.50		E P O	S R	431.30	1220.35
44	53.25	4.88	4.88	47.00	45.25	32-1.88	49.75	8.13	0.50		S R	E P O	478.97	1397.87
46	55.75	5.06	5.06	49.00	47.38	28-2.00	52.00	8.50	0.50		E P O	S R	560.69	1588.55
48	57.75	5.25	5.25	51.25	49.38	32-2.00	54.00	8.81	0.50		S R	E P O	626.52	1768.78
50	60.25	5.50	5.50	53.50	51.38	32-2.12	56.25	9.13	0.50	E P O	S R	694.62	2016.67	
52	62.25	5.69	5.69	55.50	53.38	32-2.12	58.25	9.38	0.50	S R	E P O	753.64	2227.32	
54	65.25	6.00	6.00	57.75	55.50	28-2.38	61.00	9.94	0.50	E P O	S R	930.7	2580.54	
56	67.25	6.06	6.06	59.75	57.63	28-2.38	63.00	10.25	0.50	S R	E P O	978.37	2768.49	
58	69.25	6.25	6.25	62.00	59.63	32-2.38	65.00	10.50	0.50	E P O	S R	1030.58	3027.73	
60	71.25	6.44	6.44	64.00	61.63	32-2.38	67.00	10.75	0.50	E P O	S R	1121.38	3302.40	

DIMENSIONES EN PULGADAS

TIPO DE CARAS.- CARA REALZADA (R.F.), CARA PLANA (F.F.), CARA JUNTA DE ANILLO (R.T.J.)

NORMA DE FABRICACIÓN MSS-SP-44

TIPO DE ACERO DE FABRICACIÓN.- ASTM A-105, ASTM A-350 LF-1,LF-2,LF-3, ASTM A-182 F-1, F-2, F-5, F-9- F-11, F-22

NACE MR-0175 ÚLTIMA EDICIÓN

TOLERANCIAS EN PAGINA ADJUNTA