
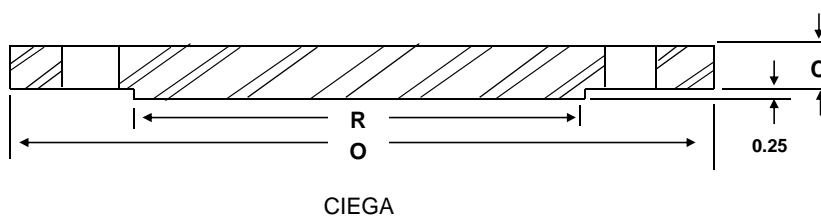


PETROFLANGE

NORMA MSS SP - 44 CLASE 600#

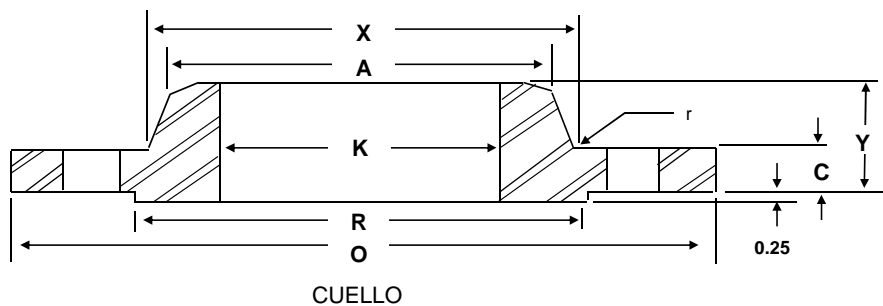

| DIAM. NOM. | O | C | | R | X | No. / DIAM BARRENO | DIAM CIRC BARR | Y | r (MIN) | K | A | Peso Aprox. (Kgs.) | |
|------------|-------|--------|-------|-------|-------|--------------------|----------------|-------|---------|-----------------------------------|-----------------------------------|--------------------|---------|
| | | CUELLO | CIEGA | | | | | | | | | CUELLO | CIEGA |
| 12 | 22.00 | 2.62 | 2.62 | 15.00 | 15.75 | 20-1.38 | 19.25 | 6.12 | 0.44 | D E B E | D E B E | 101.00 | 134.00 |
| 14 | 23.75 | 2.75 | 2.75 | 16.25 | 17.00 | 20-1.50 | 20.75 | 6.50 | 0.44 | | | 157.00 | 171.00 |
| 16 | 27.00 | 3.00 | 3.00 | 18.50 | 19.50 | 20-1.62 | 23.75 | 7.00 | 0.44 | S E R | S E R | 209.00 | 239.00 |
| 18 | 29.25 | 3.25 | 3.25 | 21.00 | 21.50 | 20-1.75 | 25.75 | 7.25 | 0.44 | | | 217.00 | 302.00 |
| 20 | 32.00 | 3.50 | 3.50 | 23.00 | 24.00 | 24-1.75 | 28.50 | 7.50 | 0.44 | S P C E L C I E F N I T C E A D O | S P C E L C I E F N I T C E A D O | 313.00 | 388.00 |
| 22 | 34.25 | 3.75 | 3.75 | 25.25 | 26.50 | 24-1.88 | 30.62 | 7.75 | 0.44 | | | 336.00 | 454.00 |
| 24 | 37.00 | 4.00 | 4.00 | 27.25 | 28.25 | 24-2.00 | 33.00 | 8.00 | 0.44 | P O R | P O R | 443.00 | 522.00 |
| 26 | 40.00 | 4.25 | 4.94 | 29.50 | 28.38 | 28-2.00 | 36.00 | 8.75 | 0.50 | | | 426.76 | 798.59 |
| 28 | 42.25 | 4.38 | 5.19 | 31.50 | 30.50 | 28-2.13 | 38.00 | 9.25 | 0.50 | E L | E L | 481.24 | 935.69 |
| 30 | 44.50 | 4.50 | 5.50 | 33.75 | 32.56 | 28-2.13 | 40.25 | 9.75 | 0.50 | | | 549.34 | 1100.04 |
| 32 | 47.00 | 4.63 | 5.81 | 36.00 | 34.69 | 28-2.38 | 42.50 | 10.25 | 0.50 | P O R | P O R | 624.25 | 1296.62 |
| 34 | 49.00 | 4.75 | 6.06 | 38.00 | 36.88 | 28-2.38 | 44.50 | 10.63 | 0.50 | | | 699.16 | 1469.60 |
| 36 | 51.75 | 4.88 | 6.38 | 40.25 | 39.00 | 28-2.63 | 47.00 | 11.13 | 0.56 | E L | E L | 774.07 | 1726.11 |
| 38 | 50.00 | 6.00 | 6.13 | 40.50 | 39.13 | 28-2.38 | 45.75 | 10.00 | 0.56 | | | 667.38 | 1545.42 |
| 40 | 52.00 | 6.25 | 6.38 | 43.75 | 41.25 | 32-2.38 | 47.75 | 10.38 | 0.56 | P O R | P O R | 740.02 | 1742.45 |
| 42 | 55.25 | 6.63 | 6.75 | 46.00 | 43.25 | 28-2.63 | 50.50 | 11.00 | 0.56 | | | 921.62 | 2081.59 |
| 44 | 57.25 | 6.81 | 7.00 | 48.25 | 45.25 | 32-2.63 | 52.50 | 11.38 | 0.56 | E L | E L | 980.64 | 2317.67 |
| 46 | 59.50 | 7.06 | 7.31 | 50.25 | 47.38 | 32-2.63 | 54.75 | 11.81 | 0.56 | | | 1094.14 | 2614.13 |
| 48 | 62.75 | 7.44 | 7.69 | 52.50 | 49.38 | 32-2.88 | 57.50 | 12.44 | 0.56 | P O R | P O R | 1296.17 | 3058.60 |
| 50 | 65.75 | 7.75 | 8.00 | 54.50 | 51.38 | 28-3.13 | 60.00 | 12.94 | 0.56 | | | 1511.82 | 3493.53 |
| 52 | 67.75 | 8.00 | 8.25 | 56.50 | 53.38 | 32-3.13 | 62.00 | 13.25 | 0.56 | E L | E L | 1616.24 | 3825.40 |
| 54 | 70.00 | 8.25 | 8.56 | 58.75 | 55.50 | 32-3.13 | 64.25 | 13.75 | 0.56 | | | 1779.68 | 4237.18 |
| 56 | 73.00 | 8.56 | 8.88 | 60.75 | 57.63 | 32-3.38 | 66.75 | 14.25 | 0.63 | E L | E L | 1943.12 | 4780.17 |
| 58 | 75.00 | 8.75 | 9.13 | 63.00 | 59.63 | 32-3.38 | 68.75 | 14.56 | 0.63 | | | 2106.56 | 5181.96 |
| 60 | 78.50 | 9.19 | 9.56 | 65.25 | 61.63 | 28-3.63 | 71.75 | 15.31 | 0.69 | | | 2270.00 | 5951.03 |

DIMENSIONES EN PULGADAS

TIPO DE CARAS.- CARA REALZADA (R.F.), CARA PLANA (F.F.), CARA JUNTA DE ANILLO (R.T.J.)

NORMA DE FABRICACIÓN MSS-SP-44

TIPO DE ACERO DE FABRICACIÓN.- ASTM A-105, ASTM A-350 LF-1,LF- 2,LF-3, ASTM A-182 F-1, F-2, F-5, F-9- F-11, F-22

NACE MR-0175 ÚLTIMA EDICIÓN

TOLERANCIAS EN PAGINA ADJUNTA