


PETROFLANGE

TEE'S RECTAS Y REDUCIDAS

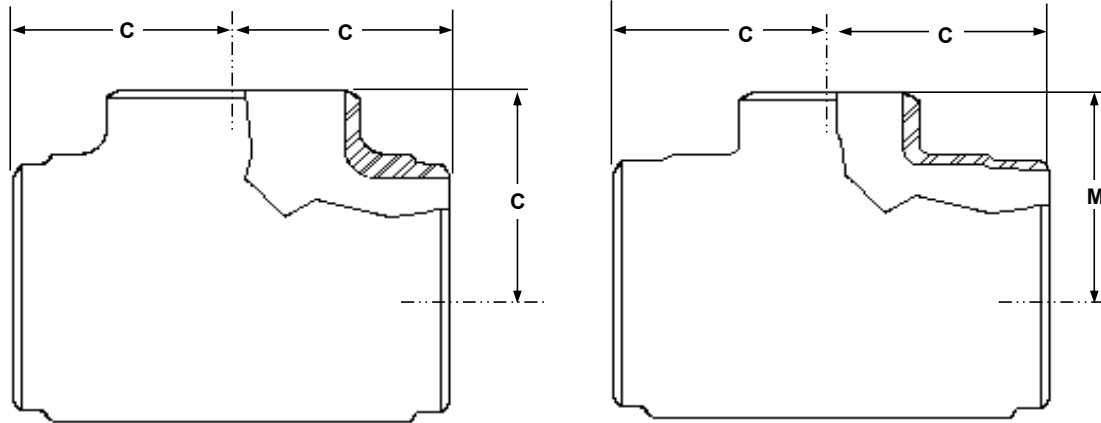

DIAMETRO NOMINAL		DEL CENTRO AL FINAL	
BOCA	BOCA	C	M
1/2	1/2	1.00	1.00
	3/8	1.00	1.00
	1/4	1.00	1.00
3/4	3/4	1.13	1.13
	1/2	1.13	1.13
	3/8	1.13	1.13
1	1	1.50	1.50
	3/4	1.50	1.50
	1/2	1.50	1.50
	3/8	1.50	1.50
1-1/4	1-1/4	1.88	1.88
	1	1.88	1.88
	3/4	1.88	1.88
	1/2	1.88	1.88
1-1/2	1-1/2	2.25	2.25
	1-1/4	2.25	2.25
	1	2.25	2.25
	3/4	2.25	2.25
	1/2	2.25	2.25
	1/2	2.25	2.25

DIAMETRO NOMINAL		DEL CENTRO AL FINAL	
BOCA	BOCA	C	M
2	2	2.50	2.50
	1-1/2	2.50	2.38
	1-1/4	2.50	2.25
	1	2.50	2.00
2-1/2	3/4	2.50	1.75
	2-1/2	3.00	3.00
	2	3.00	2.75
3	1-1/2	3.00	2.63
	1-1/4	3.00	2.50
	1	3.00	2.25
	3	3.88	3.88
3-1/2	2-1/2	3.88	3.25
	2	3.88	3.00
	1	3.88	2.88
4	1	3.88	2.75
	1	3.88	2.63
	3	4.88	4.88

DIAMETRO NOMINAL		DEL CENTRO AL FINAL	
BOCA	BOCA	C	M
3-1/2	3-1/2	3.75	3.75
	3	3.75	3.63
	2-1/2	3.75	3.50
4	2	3.75	3.25
	1-1/2	3.75	3.13
	4	4.13	4.13
4-1/2	3-1/2	4.13	4.00
	3	4.13	3.88
	2-1/2	4.13	3.75
	2	4.13	3.50
5	1-1/2	4.13	3.38
	5	4.88	4.88
	4	4.88	4.63
	3-1/2	4.88	4.50
	3	4.88	4.38
5-1/2	2-1/2	4.88	4.25
	2	4.88	4.13

SE FABRICAN DE CONFORMIDAD CON:

ASTM A-234 EN TODOS SUS GRADOS

WPB, WPC, WP1, WP12 CL1, WP12 CL2, WP11 C L1, WP11 CL2, WP11 CL3, WP22 CL1, WP22 CL3

WP5 CL1, WP5 CL3, WP9 CL1, WP9 CL3, WPR, WP91

CONTROLES DE CALIDAD

ANSI B16.9

ASME A/SA 234 WPB

ASME B16.9

ASME B16.28

MSS SP-75

ASTM A 234/A234M16

NACE MR 0175 ISO 15156