


PETROFLANGE

NORMA MSS SP - 44 CLASE 150#

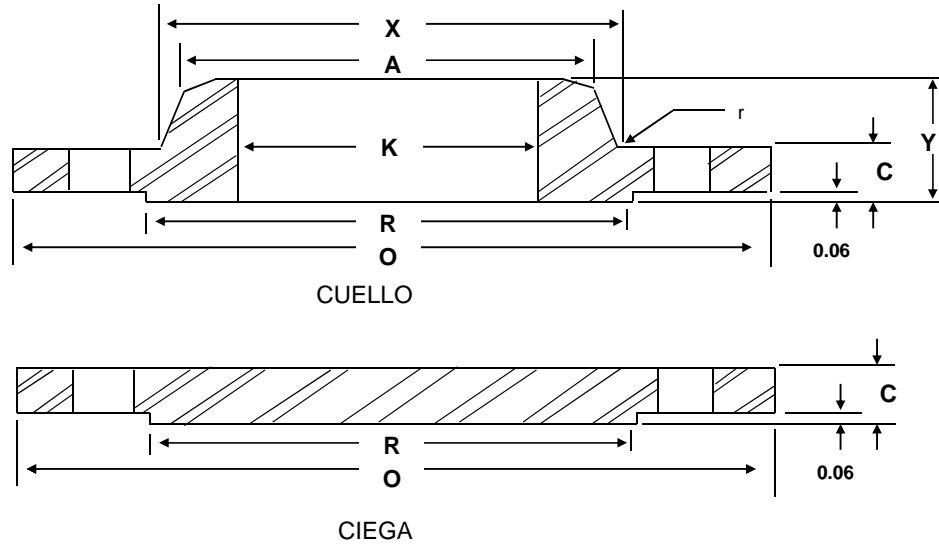

DIAM. NOM.	O	C	R	X	No. / DIAM BARRENO	DIAM CIRCULO BARRENOS	Y	r (MIN)	K	A	Peso Aprox. (Kgs.)	
											CUELLO	CIEGA
12	19.00	1.25	15.00	14.38	12-1.00	17.00	4.50	0.38	D E B E S E R S P E L C I E F N I T C E A D O	D E B E S E R S P E L C I E F N I T C E A D O	38.00	45.00
14	21.00	1.38	16.25	15.75	12-1.12	18.75	5.00	0.38			51.00	59.00
16	23.50	1.44	18.50	18.00	16-1.12	21.25	5.00	0.38			63.00	77.00
18	25.00	1.56	21.00	19.88	16-1.25	22.75	5.50	0.38			68.00	102.00
20	27.50	1.69	23.00	22.00	20-1.25	25.00	5.69	0.38			82.00	123.00
22	29.50	1.81	25.25	24.00	20-1.38	27.25	5.88	0.38			102.00	161.00
24	32.00	1.88	27.25	26.12	20-1.38	29.50	6.00	0.38			119.00	203.00
26	34.25	2.69	29.50	26.63	24-1.38	31.75	4.75	0.38			136.20	318.71
28	36.50	2.81	31.50	28.63	28-1.38	34.00	4.94	0.44			156.63	378.18
30	38.75	2.94	33.75	30.75	28-1.38	36.00	5.38	0.44			181.60	445.83
32	41.75	3.18	36.00	32.75	28-1.62	38.50	5.69	0.44			229.27	561.60
34	43.75	3.25	38.00	34.75	32-1.62	40.50	5.88	0.50			245.16	628.34
36	46.00	3.56	40.25	36.75	32-1.62	42.75	6.19	0.50	290.56	760.90		
38	48.75	3.44	42.25	39.00	32-1.62	45.25	6.19	0.50	326.88	825.83		
40	50.75	3.56	44.25	41.00	36-1.62	47.25	6.44	0.50	351.85	926.16		
42	53.00	3.81	47.00	43.00	36-1.62	49.50	6.75	0.50	404.06	1080.97		
44	55.25	4.00	49.00	45.00	40-1.62	51.75	7.00	0.50	449.46	1233.52		
46	57.25	4.06	51.00	47.13	40-1.62	53.75	7.31	0.50	481.24	1344.29		
48	59.50	4.25	53.50	49.13	44-1.62	56.00	7.56	0.50	537.99	1519.99		
50	61.75	4.38	55.50	51.25	44-1.88	58.25	8.00	0.50	576.58	1687.06		
52	64.00	4.56	57.50	53.25	44-1.88	60.50	8.25	0.50	640.14	1886.82		
54	66.25	4.75	59.50	55.25	44-1.88	62.75	8.50	0.50	719.59	2106.11		
56	68.75	4.88	62.00	57.38	48-1.88	65.00	9.00	0.50	799.04	2329.93		
58	71.00	5.06	64.00	59.38	48-1.88	67.25	9.25	0.50	869.41	2576.45		
60	73.00	5.19	66.00	61.38	52-1.88	69.25	9.44	0.50	928.43	2793.92		

DIMENSIONES EN PULGADAS

TIPO DE CARAS.- CARA REALZADA (R.F.), CARA PLANA (F.F.), CARA JUNTA DE ANILLO (R.T.J.)

NORMA DE FABRICACIÓN MSS-SP-44

TIPO DE ACERO DE FABRICACIÓN.- ASTM A-105, ASTM A-350 LF-1,LF- 2,LF-3, ASTM A-182 F-1, F-2, F-5, F-9- F-11, F-22

NACE MR-0175 ÚLTIMA EDICIÓN

TOLERANCIAS EN PAGINA ADJUNTA